CBP -22, 01102

OMB Control No. 1660-0008 Expiration Date: 06/30/2026

U.S. DEPARTMENT OF HOMELAND SECURITY Federal Emergency Management Agency National Flood Insurance Program

406827

ELEVATION CERTIFICATE

IMPORTANT: MUST FOLLOW THE INSTRUCTIONS ON INSTRUCTION PAGES 1-11

Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2) insurance agent/company, and (3) building owner.

SECTION A - PR	OPERTY INFORMATION	FOR INSURANCE COMPANY USE				
A1. Building Owner's Name: SHANE M. DI	MORA	Policy Number:				
A2. Building Street Address (including Apt., Ur 1505 Bayshore Blvd.	A2. Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No.: 1505 Bayshore Blvd.					
City: Indian Rocks Beach	State: FL	ZIP Code: 33785				
	Numbers or Legal Description) and/or Tax Parcel Nur ed Map of Indian Beach-Plat Book 25, Page 30-F					
A4. Building Use (e.g., Residential, Non-Res	idential, Addition, Accessory, etc.): Residential					
A5. Latitude/Longitude: Lat. 27.897512°N	Long82.843571°W Horiz. Datum:	NAD 1927 🔲 NAD 1983 🖂 WGS 84				
	ur clear color photographs (one for each side) of the bi					
A7. Building Diagram Number:7						
A8. For a building with a crawlspace or enclo	sure(s):					
a) Square footage of crawispace or enclo	osure(s): 1830 sq. ft.					
b) Is there at least one permanent flood	opening on two different sides of each enclosed area?	⊠ Yes ☐ No ☐ N/A				
	nings in the crawlspace or enclosure(s) within 1.0 foot N/A Engineered flood openings:10	above adjacent grade:				
d) Total net open area of non-engineered	flood openings in A8.c: N/A sq. in.					
e) Total rated area of engineered flood or	penings in A8.c (attach documentation – see Instruction	ns): 2000 sq. ft.				
f) Sum of A8.d and A8.e rated area (if ap	pplicable – see Instructions): N/A sq. ft.					
A9. For a building with an attached garage:						
a) Square footage of attached garage:	N/A sq. ft.					
b) Is there at least one permanent flood o	pening on two different sides of the attached garage?	☐ Yes ☒ No ☐ N/A				
	ings in the attached garage within 1.0 foot above adjacently N/A Engineered flood openings: N/A	cent grade:				
d) Total net open area of non-engineered	flood openings in A9.c: N/A sq. in.					
e) Total rated area of engineered flood op	enings in A9.c (attach documentation – see Instruction	ns): <u>N/A</u> sq. ft.				
f) Sum of A9.d and A9.e rated area (if ap	plicable – see Instructions): N/A sq. ft.					
SECTION B - F	LOOD INSURANCE RATE MAP (FIRM) INFORI	MATION				
B1.a. NFIP Community Name: <u>City of Indian F</u>	Rocks Beach B1.b. NFIP Comm	nunity Identification Number: 125117				
B2. County Name: Pinellas	B3. State: FL B4. Map/Panel No.: <u>12</u>	2103C0113/114 B5, Suffix: H				
B6. FIRM Index Date: 08/24/2021	B7. FIRM Panel Effective/Revised Date: 08/24/202	1				
B8. Flood Zone(s): AE	B9. Base Flood Elevation(s) (BFE) (Zone AO, use Ba	ase Flood Depth): 9.0' AND 10.0'				
B10. Indicate the source of the BFE data or Ba ☐ FIS ☑ FIRM ☐ Community Determ						
311. Indicate elevation datum used for BFE in	Item B9: ☐ NGVD 1929 ☑ NAVD 1988 ☐ Other/S	Source:				
_	r Resources System (CBRS) area or Otherwise Protec CBRS	cted Area (OPA)? ☐ Yes ☒ No				
313. Is the building located seaward of the Lim	it of Moderate Wave Action (LiMWA)? Tyes X N	o				

Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No.: 1505 Bayshore Blvd.	FOR INSURANCE COMPANY USE				
City: Indian Rocks Beach State: FL ZIP Code: 33785	Policy Number:				
only. Indian rooks beach State. TE ZIF code. 33703	Company NAIC Number:				
SECTION C - BUILDING ELEVATION INFORMATION (SUI	RVEY REQUIRED)				
C1. Building elevations are based on: Construction Drawings* Building Under Co *A new Elevation Certificate will be required when construction of the building is complet					
C2. Elevations – Zones A1–A30, AE, AH, AO, A (with BFE), VE, V1–V30, V (with BFE), AR, A99. Complete Items C2.a–h below according to the Building Diagram specified in Item Benchmark Utilized: Pinellas County Map #176 Vertical Datum: NAVD	A7. In Puerto Rico only, enter meters.				
Indicate elevation datum used for the elevations in items a) through h) below. ☐ NGVD 1929 ☑ NAVD 1988 ☐ Other:					
Datum used for building elevations must be the same as that used for the BFE. Conversion for If Yes, describe the source of the conversion factor in the Section D Comments area.	actor used? Yes No Check the measurement used:				
a) Top of bottom floor (including basement, crawlspace, or enclosure floor):	4,25 🛛 feet 🗍 meters				
b) Top of the next higher floor (see Instructions):	15.41 🔀 feet 🗌 meters				
c) Bottom of the lowest horizontal structural member (see Instructions):	N/A ⊠ feet ☐ meters				
d) Attached garage (top of slab):	N/A feet meters				
e) Lowest elevation of Machinery and Equipment (M&E) servicing the building (describe type of M&E and location in Section D Comments area):	12.09 🛛 feet 🗌 meters				
f) Lowest Adjacent Grade (LAG) next to building: Natural Finished	3.68 🛛 feet 🗌 meters				
g) Highest Adjacent Grade (HAG) next to building: 🔲 Natural 🔀 Finished	4.17 🛛 feet 📋 meters				
h) Finished LAG at lowest elevation of attached deck or stairs, including structural support: ———————————————————————————————————	N/A ⊠ feet ☐ meters				
SECTION D – SURVEYOR, ENGINEER, OR ARCHITECT	CERTIFICATION				
This certification is to be signed and sealed by a land surveyor, engineer, or architect authori information. I certify that the information on this Certificate represents my best efforts to interplate statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 100	oret the data available. I understand that any				
Were latitude and longitude in Section A provided by a licensed land surveyor? 🛛 Yes 🗀	No				
Check here if attachments and describe in the Comments area.					
Certifier's Name: John O. Brendla License Number: LS 4601					
Title: President	10 Jr 3.00				
Company Name: John C. Brendla & Associates, Inc.	Charles				
Address: 4015 82nd Avenue North					
City: Pinellas Park State: FL ZIP Code: 3378	1 \$5 4 @ CI				
Telephone: (727) 576-7546 Ext.: 0 Email: dely@jcbrendla.com	11.06.2023				
Signature: Date: 11/06/20					
Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2) insu	rance agent/company, and (3) building owner.				
Comments (including source of conversion factor in C2; type of equipment and location per C2.e; and description of any attachments): C2) e. The Water Heater located on the North side of the Hous NOTE: There are 10 Smart Vents Model #1540-420 -ICC-ES Evaluation Report is attached Benchmark: Pinellas County Map #176 (Hall J) Elev. 4.36' NAVD - MSL = 0.00 Latitude/Longitude derived from Google Earth Pro					

Building Street Address (including Apt	., Unit, Suite, and/or Bio	ig. ivo.) (or P.O. Route and	d Box No.:	FOR INSURA	NCE COMPANY USE
1505 Bayshore Blvd. City: Indian Rocks Beach	State:	FL	ZIP Code: 33	785	Policy Numbe	
SECTION E - E	BUILDING MEASUR R ZONE AO, ZONE	EMEN?	INFORMATION	ON (SURVEY A (WITHOUT	NOT REQUIR	
For Zones AO, AR/AO, and A (withou intended to support a Letter of Map C enter meters.	it BFE), complete Item	s E1-E5	. For Items E1-I	E4. use natural	grade if availabl	e. If the Certificate is In Puerto Rico only,
Building measurements are based on *A new Elevation Certificate will be re-	: Construction Dr	awings* on of the	Building Un	der Construction	on* 🔲 Finished	Construction
E1. Provide measurements (C.2.a in measurement is above or below t	applicable Building Dia he natural HAG and th	igram) fo e LAG.	or the following a	and check the a	ppropriate boxes	to show whether the
 a) Top of bottom floor (including learning learning) crawlspace, or enclosure) is: 	pasement, —		[feet	meters	☐ above or	below the HAG.
 b) Top of bottom floor (including because) is: 	pasement,		feet	meters	above or	below the LAG.
E2. For Building Diagrams 6–9 with penetr higher floor (C2.b in applicable)	e	js provid	led in Section A	Items 8 and/or	9 (see pages 1–2	2 of Instructions), the
Building Diagram) of the building is E3. Attached garage (top of slab) is:	S:			meters meters	above or	below the HAG.
 Top of platform of machinery and/o servicing the building is: 	or equipment		 feet	☐ meters	☐ above or 〔	below the HAG.
E5. Zone AO only: If no flood depth nur floodplain management ordinance?	mber is available, is th	e top of	the bottom floor nown The lo	elevated in acc	ordance with the	
SECTION F - PROPERTY	OWNER (OR OWN	ER'S A				
he property owner or owner's authorize	ed representative who	complet	es Sections A, B	and E for Zor		
gn here. <i>The statements in Sections A</i>] Check here if attachments and desc			st of my knowle	dge		
roperty Owner or Owner's Authorized F		2100.				
ddress:			· · · · · · · · · · · · · · · · · · ·	***		
ity:				State:	ZIP Code:	
elephone: E	xt.: Email:				<u> </u>	
gnature:			Date:			

Building Street Address (including Apt., Unit	, Suite, and/or Bldg	g. No.) o	or P.O. Route	and Box No.:	FOR INSU	JRANCE COMPANY USE	
1505 Bayshore Blvd.					- Policy Num	nber:	
City: Indian Rocks Beach	State:	FL	_ ZIP Code:	33785	Company I	NAIC Number:	
SECTION G - COMMUNITY IN	IFORMATION (F	RECO	MMENDED	FOR COMMUN	ITY OFFICIA	L COMPLETION)	
The local official who is authorized by law Section A, B, C, E, G, or H of this Elevatio	or ordinance to a	dministe	er the commu	unity's floodplain n	nanagement or		
G1. The information in Section C v engineer, or architect who is a elevation data in the Commen	uthorized by state	ner docu law to	umentation th certify elevat	nat has been signe ion information. (I	ed and sealed l ndicate the sou	by a licensed surveyor, urce and date of the	
	G2.a. A local official completed Section E for a building located in Zone A (without a BFE), Zone AO, or Zone AR/AO, or when item E5 is completed for a building located in Zone AO.						
G2.b. A local official completed Sect	ion H for insuranc	e purpo	oses.				
G3.	ion G, the local of	ficial de	escribes spec	cific corrections to	the information	n in Sections A, B, E and I	
G4.	ns G5–G11) is pro	ovided f	or community	y floodplain manag	gement purpos	ses.	
G5. Permit Number	1102 G6	. Date F	ermit Issued	ł:	 		
G7. Date Certificate of Compliance/Oc	ccupancy Issued:						
G8. This permit has been issued for:	New Construc	ction [] Substantia	Il Improvement			
G9.a. Elevation of as-built lowest floor (i	ncluding basemer	nt) of th	e 	[feet	meters	Datum:	
G9.b. Elevation of bottom of as-built low member:	est horizontal stru	ctural	<u> </u>	[_] feet	meters	Datum:	
G10.a. BFE (or depth in Zone AO) of floo	ding at the buildin	ig site:			meters	Datum:	
G10.b. Community's minimum elevation of requirement for the lowest floor of member:			ıral	feet	☐ meters	Datum:	
G11. Variance issued? Yes	No If yes, attacl	h docur	mentation and	d describe in the C	Comments area	a.	
The local official who provides informatio correct to the best of my knowledge. If ap	n in Section G mu	ıst sign Iso prov	here. I have vided specific	completed the info	ormation in Sec Comments ar	ction G and certify that it is rea of this section.	
NFIP Community Name:	`				·		
	xt.: Email	:					
Address:							
City:				State:	ZIP (Code:	
Signature:	>			oate 12/14/202			
Comments (including type of equipment Sections A, B, D, E, or H):						_	
DECTION D COM	MENTE	, , 4	SWAD	とってい	1540 -	-520	
(ADDEARS T	180						

Building Street Address (including Apt., Unit, Su	uite, and/or Bldg. No.)	or P.O. Route an	d Box No.:	FOR I	NSURANCE COMPANY USE
1505 Bayshore Blvd.					Policy	Number:
City: Indian Rocks Bea	acn	State: FL	ZIP Code: <u>33</u>	785	— Compa	iny NAIC Number:
SEC	CTION H - BUILDIN (SURVEY NO	NG'S FIRST FLOO T REQUIRED) (FO				
to determine the building	's first floor height for i earest tenth of a mete	insurance purposes. r in Puerto Rico). Re	Sections A, B, an eference the Fou	nd I must al: Indation Ty	so be comple pe Diagrams	(at the end of Section H
H1. Provide the height of	the top of the floor (a	is indicated in Found	lation Type Diagr	ams) above	the Lowest A	Adjacent Grade (LAG):
a) For Building Dia floor (include above-ç crawlspaces or enclo	grams 1A, 1B, 3, and grade floors only for bi sure floors) is:	I 5–8. Top of bottom uildings with		_ feet	meters	above the LAG
b) For Building Diag higher floor (i.e., the f enclosure floor) is:				feet	meters [above the LAG
H2. Is all Machinery and I H2 arrow (shown in th	Equipment servicing the Foundation Type Di	he building (as listed lagrams at end of So	l in Item H2 instru ection H instructio	ctions) elev	ated to or abo appropriate B	ove the floor indicated by the uilding Diagram?
SECTION I - F	PROPERTY OWNE	R (OR OWNER'S	AUTHORIZED	REPRESE	NTATIVE) (CERTIFICATION
indicate in Item G2.b and s Check here if attachme. Property Owner or Owner's Address:	nts are provided (inclusions)	ntative Name:				
Address: City:				State:		code:
Telephone:		Email:				
Signature:	<u> </u>		Date:			
Comments:						

IMPORTANT: MUST FOLLOW THE INSTRUCTIONS ON PAGES 9-19 BUILDING PHOTOGRAPHS

See Instructions for Item A6.

Building Street Address (including Apt., U	FOR INSURANCE COMPANY USE				
1505 Bayshore Blvd. City: Indian Rocks Beach	State:	FL	ZIP Code: <u>337</u>	85	Policy Number: Company NAIC Number:

Instructions: Insert below at least two and when possible four photographs showing each side of the building (for example, may only be able to take front and back pictures of townhouses/rowhouses). Identify all photographs with the date taken and "Front View," "Rear View," "Right Side View," or "Left Side View." Photographs must show the foundation. When flood openings are present, include at least one close-up photograph of representative flood openings or vents, as indicated in Sections A8 and A9.



Photo One

Photo One Caption: FRONT

Clear Photo One



Photo Two

Photo Two Caption: REAR

Clear Photo Two

ELEVATION CERTIFICATE IMPORTANT: MUST FOLLOW THE INSTRUCTIONS ON PAGES 9-19 BUILDING PHOTOGRAPHS

Continuation Page

		Continu	Jation Page	
Building Street Address (including Apt., Unit, 1505 Bayshore Blvd.	Suite, and/or Bld	g. N o.) o	r P.O. Route and Box No.:	FOR INSURANCE COMPANY USE
City: Indian Rocks Beach	State:	FL	ZIP Code: <u>33785</u>	Policy Number: Company NAIC Number:
Insert the third and fourth photographs belo View," or "Left Side View." When flood oper vents, as indicated in Sections A8 and A9.	nings are present	/202	e at least one close-up photog	graph of representative flood openings or
		Photo	Three	
Photo Three Caption: EQUIPMENT				Clear Photo Three
	8/07/	202	3 1:45 PM	

Photo Four

Photo Four Caption: VENT

Clear Photo Four



Most Widely Accepted and Trusted

ESR-2074

Reissued 02/2017 Revised 10/2018 This report is subject to renewal 02/2019.

ICC-ES Evaluation Report

ICC-ES | (800) 423-6587 | (562) 699-0543 | www.icc-es.org

DIVISION: 08 00 00—OPENINGS

SECTION: 08 95 43—VENTS/FOUNDATION FLOOD VENTS

REPORT HOLDER:

SMART VENT PRODUCTS, INC.


EVALUATION SUBJECT:

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514 FLOOD VENT SEALING KIT #1540-526



"2014 Recipient of Prestigious Western States Seismic Policy Council (WSSPC) Award in Excellence"









ICC-ES Evaluation Report

ESR-2074

Reissued February 2017 Revised October 16, 2018

This report is subject to renewal February 2019.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00—OPENINGS

Section: 08 95 43—Vents/Foundation Flood Vents

REPORT HOLDER:

SMART VENT PRODUCTS, INC.

EVALUATION SUBJECT:

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514 FLOOD VENT SEALING KIT #1540-526

1.0 EVALUATION SCOPE

Compliance with the following codes:

- 2018, 2015, 2012, 2009 and 2006 International Building Code® (IBC)
- 2018, 2015, 2012, 2009 and 2006 International Residential Code® (IRC)
- 2018 International Energy Conservation Code® (IECC)
- 2013 Abu Dhabi International Building Code (ADIBC)[†]

[†]The ADIBC is based on the 2009 IBC. 2009 IBC code sections referenced in this report are the same sections in the ADIBC.

Properties evaluated:

- Physical operation
- Water flow

2.0 USES

The Smart Vent[®] units are engineered mechanically operated flood vents (FVs) employed to equalize hydrostatic pressure on walls of enclosures subject to rising or falling flood waters. Certain models also allow natural ventilation.

3.0 DESCRIPTION

3.1 General:

When subjected to rising water, the Smart Vent® FVs internal floats are activated, then pivot open to allow flow in either direction to equalize water level and hydrostatic pressure from one side of the foundation to the other. The FV pivoting door is normally held in the closed position by a buoyant release device. When subjected to rising water, the buoyant release device causes the unit to unlatch, allowing the door to rotate out of the way and allow flow. The water level stabilizes, equalizing the lateral forces.

Each unit is fabricated from stainless steel. Smart Vent® Automatic Foundation Flood Vents are available in various models and sizes as described in Table 1. The SmartVENT® Stacking Model #1540-511 and FloodVENT® Stacking Model #1540-521 units each contain two vertically arranged openings per unit.

3.2 Engineered Opening:

The FVs comply with the design principle noted in Section 2.7.2.2 and Section 2.7.3 of ASCE/SEI 24-14 [Section 2.6.2.2 of ASCE/SEI 24-05 (2012, 2009, 2006 IBC and IRC)] for a maximum rate of rise and fall of 5.0 feet per hour (0.423 mm/s). In order to comply with the engineered opening requirement of ASCE/SEI 24, Smart Vent FVs must be installed in accordance with Section 4.0.

3.3 Ventilation:

The SmartVENT® Model #1540-510 and SmartVENT® Overhead Door Model #1540-514 both have screen covers with ¹/₄-inch-by-¹/₄-inch (6.35 by 6.35 mm) openings, yielding 51 square inches (32 903 mm²) of net free area to supply natural ventilation. The SmartVENT® Stacking Model #1540-511 consists of two Model #1540-510 units in one assembly, and provides 102 square inches (65 806 mm²) of net free area to supply natural ventilation. Other FVs recognized in this report do not offer natural ventilation.

3.4 Flood Vent Sealing Kit:

The Flood Vent Sealing Kit Model #1540-526 is used with SmartVENT® Model #1540-520. It is a Homasote 440 Sound Barrier® (ESR-1374) insert with 21 – 2-inch-by-2-inch (51 mm x 51 mm) squares cut in it. See Figure 4.

4.0 DESIGN AND INSTALLATION

4.1 SmartVENT® and FloodVENT®:

SmartVENT® and FloodVENT® are designed to be installed into walls or overhead doors of existing or new construction from the exterior side. Installation of the vents must be in accordance with the manufacturer's instructions, the applicable code and this report. Installation clips allow mounting in masonry and concrete walls of any thickness. In order to comply with the engineered opening design principle noted in Section 2.7.2.2 and 2.7.3 of ASCE/SEI 24-14 [Section 2.6.2.2 of ASCE/SEI 24-05 (2012, 2009, 2006 IBC and IRC)], the Smart Vent® FVs must be installed as follows:

- With a minimum of two openings on different sides of each enclosed area.
- With a minimum of one FV for every 200 square



feet (18.6 m²) of enclosed area, except that the SmartVENT® Stacking Model #1540-511 and FloodVENT® Stacking Model #1540-621 must be installed with a minimum of one FV for every 400 square feet (37.2 m²) of enclosed area.

- Below the base flood elevation.
- With the bottom of the FV located a maximum of 12 inches (305.4 mm) above the higher of the final grade or floor and finished exterior grade immediately under each opening.

4.2 Flood Vent Sealing Kit

The Flood Vent Sealing Kit Model 1540-526 is used in conjunction with FloodVENT[®] Model #1540-520. When installed and tested in accordance with ASTM E283, the FV and Flood Vent Sealing Kit assembly have an air leakage rate of less than 0.2 cubic feet per minute per lineal foot (18.56 l/mln per lineal meter) at a pressure differential of 1 pound per square foot (50 Pa) based on 12.58 lineal feet (3.8 lineal meters) contained by the Flood Vent Sealing Kit.

5.0 CONDITIONS OF USE

The Smart Vent® FVs described in this report comply with, or are suitable alternatives to what is specified in, those codes listed in Section 1.0 of this report, subject to the following conditions:

5.1 The Smart Vent[®] FVs must be installed in accordance with this report, the applicable code and the manufacturer's installation instructions. In the event of a conflict, the instructions in this report govern. 5.2 The Smart Vent[®] FVs must not be used in the place of "breakaway walls" in coastal high hazard areas, but are permitted for use in conjunction with breakaway walls in other areas.

6.0 EVIDENCE SUBMITTED

- 6.1 Data in accordance with the ICC-ES Acceptance Criteria for Mechanically Operated Flood Vents (AC364), dated August 2015 (editorially revised October 2017).
- 6.2 Test report on air infiltration in accordance with ASTM E283.

7.0 IDENTIFICATION

- 7.1 The Smart VENT[®] models and the Flood Vent Sealing Kit recognized in this report must be identified by a label bearing the manufacturer's name (Smartvent Products, Inc.), the model number, and the evaluation report number (ESR-2074).
- 7.2 The report holder's contact information is the following:

SMART VENT PRODUCTS, INC. 430 ANDBRO DRIVE, UNIT 1 PITMAN, NEW JERSEY 08071 (877) 441-8368

www.smartvent.com info@smartvent.com

TAR	IF.	-	IODEI	SIZES
IAD			UDE	- 31463

MODEL NAME	MODEL NUMBER	MODEL SIZE (in.)	COVERAGE (sq. ft.)
FloodVENT [®]	1540-520	15 ³ / ₄ " X 7 ³ / ₄ "	200
SmartVENT®	1540-510	15 ³ / ₄ " X 7 ³ / ₄ "	200
FloodVENT® Overhead Door	1540-524	15 ³ / ₄ " X 7 ³ / ₄ "	200
SmartVENT® Overhead Door	1540-514	15 ³ / ₄ " X 7 ³ / ₄ "	200
Wood Wall FloodVENT®	1540-570	14" X 8 ³ / ₄ "	200
Wood Wall FloodVENT® Overhead Door	1540-574	14" X 8 ³ / ₄ "	200
SmartVENT® Stacker	1540-511	16" X 16"	400
FloodVent® Stacker	1540-521	16" X 16"	400

For SI: 1 inch = 25.4 mm; 1 square foot = m²

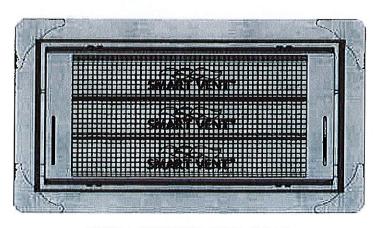


FIGURE 1-SMART VENT: MODEL 1540-510

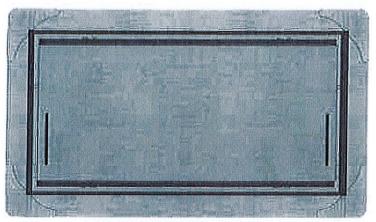


FIGURE 2—SMART VENT MODEL 1540-520

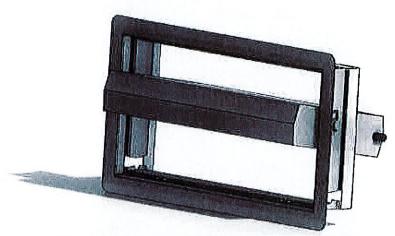


FIGURE 3—SMART VENT: SHOWN WITH FLOOD DOOR PIVOTED OPEN

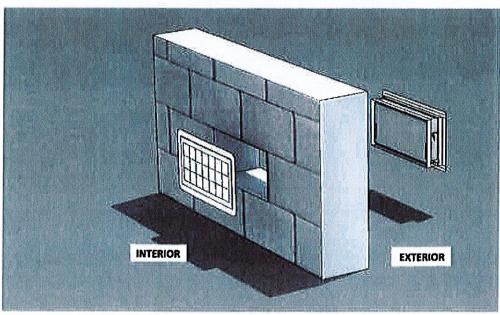


FIGURE 4—FLOOD VENT SEALING KIT



ICC-ES Evaluation Report

ESR-2074 CBC and CRC Supplement

Issued February 2017

Revised October 16, 2018

This report is subject to renewal February 2019.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00—OPENINGS

Section: 08 95 43—Vents/Foundation Flood Vents

REPORT HOLDER:

SMART VENT PRODUCTS, INC.

EVALUATION SUBJECT:

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514 FLOOD VENT SEALING KIT #1540-526

1.0 REPORT PURPOSE AND SCOPE

Purpose:

The purpose of this evaluation report supplement is to indicate that Smart Vent® Automatic Foundation Flood Vents, recognized in ICC-ES master evaluation report ESR-2074, have also been evaluated for compliance with codes noted below.

Applicable code edition:

- 2016 California Building Code (CBC)
- 2016 California Residential Code (CRC)

2.0 CONCLUSIONS

2.1 CBC:

The Smart Vent® Automatic Foundation Flood Vents, described in Sections 2.0 through 7.0 of the master evaluation report ESR-2074, comply with 2016 CBC Chapter 12, provided the design and installation are in accordance with the 2015 International Building Code® (IBC) provisions noted in the master report and the additional requirements of CBC Chapters 12, 16 and 16A, as applicable.

The products recognized in this supplement have not been evaluated under CBC Chapter 7A for use in the exterior design and construction of new buildings located in any Fire Hazard Severity Zone within State Responsibility Areas or any Wildland-Urban Interface Fire Area.

The Smart Vent® Automatic Foundation Flood Vents, described in Sections 2.0 through 7.0 of the master evaluation report ESR-2074, comply with the 2016 CRC, provided the design and installation are in accordance with the 2015 International Residential Code® (IRC) provisions noted in the master report.

The products recognized in this supplement have not been evaluated under 2016 CRC Chapter R337, for use in the exterior design and construction of new buildings located in any Fire Hazard Severity Zone within State Responsibility Areas or any Wildland-Urban Interface Fire Area.

The products_recognized in this supplement have not been evaluated for compliance with the International Wildland-Urban Interface Code®.

This supplement expires concurrently with the master report, reissued February 2017 and revised October 16, 2018.



ICC-ES Evaluation Report

ESR-2074 FBC Supplement

Reissued February 2017 Revised October 16, 2018 This report is subject to renewal February 2019.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00—OPENINGS

Section: 08 95 43—Vents/Foundation Flood Vents

REPORT HOLDER:

SMART VENT PRODUCTS, INC.

EVALUATION SUBJECT:

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514 FLOOD VENT SEALING KIT #1540-526

1.0 REPORT PURPOSE AND SCOPE

The purpose of this evaluation report supplement is to indicate that Smart Vent® Automatic Foundation Flood Vents, recognized in ICC-ES master report ESR-2074, have also been evaluated for compliance with the codes noted below.

Applicable code editions:

- 2017 Florida Building Code—Building
- 2017 Florida Building Code—Residential

2.0 CONCLUSIONS

The Smart Vent® Automatic Foundation Flood Vents, described in Sections 2.0 through 7.0 of the master evaluation report ESR-2074, comply with the *Florida Building Code—Building* and the FRC, provided the design and installation are in accordance with the 2015 *International Building Code®* provisions noted in the master report.

Use of the Smart Vent® Automatic Foundation Flood Vents has also been found to be in compliance with the High-Velocity Hurricane Zone provisions of the Florida Building Code—Building and the Florida Building Code—Residential.

For products falling under Florida Rule 9N-3, verification that the report holder's quality assurance program is audited by a quality assurance entity approved by the Florida Building Commission for the type of inspections being conducted is the responsibility of an approved validation entity (or the code official when the report holder does not possess an approval by the Commission).

This supplement expires concurrently with the master report, reissued February 2017 and revised October 16, 2018.

,		